



PUMPWORKS, Inc.

LIQUID & GAS TRANSFER TECHNOLOGY

PW2000 Series

Model

PW2133

High flow, UL-listed, single rate liquid pump for **hazardous locations**

Class 1, Div. 2, Groups A, B, C, D



FEATURES

The PW2133 has single rate capability for low-cost, simple on-off operation

For pumps with integral rate control capabilities, consult the PumpWorks, Inc. General Catalog for selection assistance within the full line of versatile dual solenoid pumps.

PW2000 Series Features

- Magnetically driven
- Leak-proof
- Pump & motor in one package
- Integral solid state circuit board for easy controllability and pump protection
- Compact for flexible installation
- Quiet (<60 db)
- Sealless and oilless
- Self priming
- Dead-head and run dry capable
- Integral overload protection

Custom pumps with expanded capabilities are available

SPECIFICATIONS

Performance

(all figures are maximums, tested on water @ room temperature)

Volume	46 gph
Pressure	45 psig
Inlet Suction	14 in. Hg
Inlet and System Pressure	1400 psi
Particle Size	1/32"
Fluid Temperature	200 °F
Power Requirements (watts)	80 - 130


Other Specifications

Weight	4.8 lbs
Inlet and Discharge Port	3/8" FNPT
Voltage (60Hz, 1 Phase)	120V
Duty Cycle	Continuous

Materials


Piston Cylinder	316 Stainless Steel
Housing	316 Stainless Steel
Elastomer Option	Fluorel (Viton equiv.) Neoprene EPDM
Piston	Coated 416 SS
Connections	Electroless Nickel Plated 416 SS

PW2133 DIMENSIONS

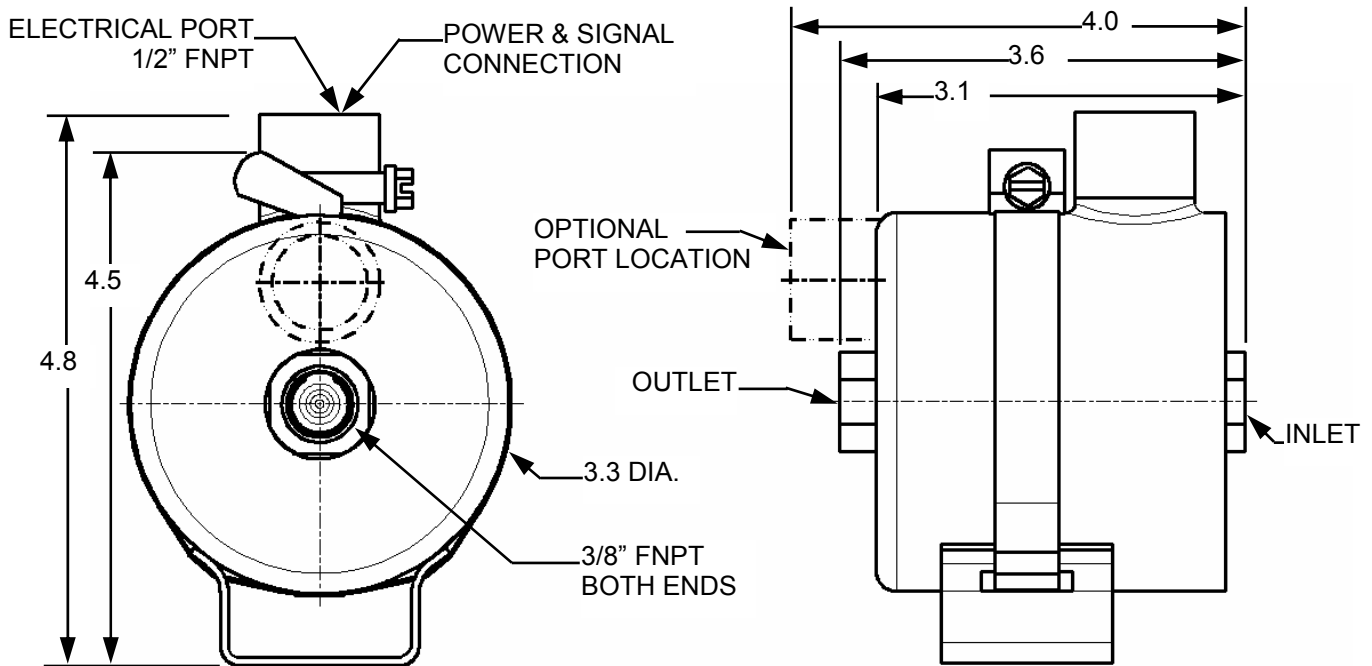

Note: All dimensions are in inches, pump shown with optional mounting kit installed

PW2000 SERIES CUTAWAY

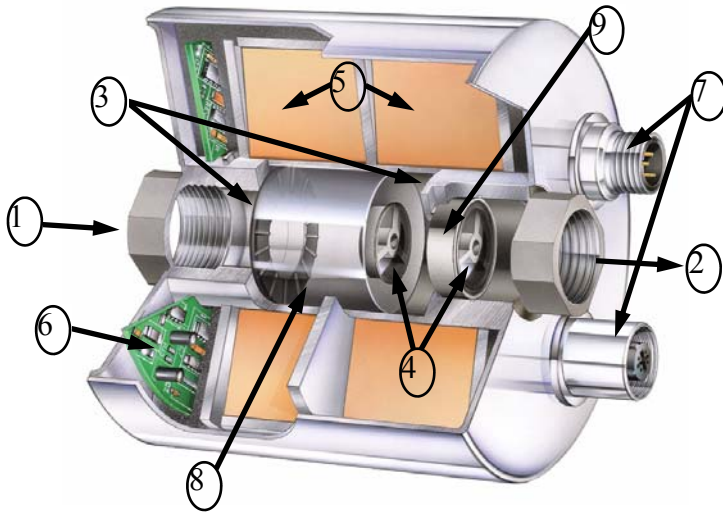

- | | |
|-----------------|-----------------------|
| 1. Inlet | 6. Circuit Board |
| 2. Outlet | 7. Cordset Connectors |
| 3. Bumpers | 8. Piston |
| 4. Check Valves | 9. Insert |
| 5. Coils | |

Note: Cutaway is typical of PW2000 Series. Exact configurations vary slightly within series.

REPLACEMENT PARTS

Item #	Part #	Description	Qty
3	100024-100	Bumper (Fluorel)	2
3	100024-200	Bumper (Neoprene)	2
3	100024-300	Bumper (EPDM)	2
4	100025-100	Check Valve (Fluorel)	2
4	100025-200	Check Valve (Neoprene)	2
4	100025-300	Check Valve (EPDM)	2
9	100026-200	Insert, 2 spoke	1
-	100029-100	Insert Retaining Ring	1
-	100030-100	Insert O-ring (Fluorel)	1
-	100030-200	Insert O-ring (Neoprene)	1
-	100030-300	Insert O-ring (EPDM)	1
-	20057	Elastomer Kit (Fluorel)	1
-	20058	Elastomer Kit (Neoprene)	1
-	20059	Elastomer Kit (EPDM)	1

PW2133-09/00



PUMPWORKS INC.
LIQUID & GAS TRANSFER TECHNOLOGY

2277-49th Avenue North
Minneapolis, MN 55430 USA

sales@pumpworks-inc.com
www.pumpworksinc.com



Distributed By:

Phone: 612-521-9331
Toll Free: 800-431-4408
Fax: 612-521-9397